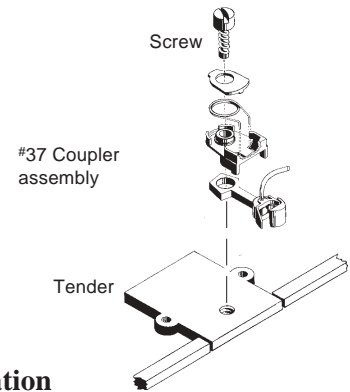


# LIONEL HO

## 4-8-4 GS-4

### #37 COUPLER CONVERSION FOR TENDER ONLY

1. Discard existing tender coupler box and smooth coupler mounting surface with a file.
2. Assemble the #37 Coupler as per the instructions.
3. Mount coupler and coupler box to the tender with the coupler on top and the spring on the bottom. Do not use the coupler box lid.
4. Check for correct coupler height, function, and clearance and make any adjustments necessary.



**Fig.1**

**#37 Installation**