


No. 839

Truck centering springs and retainers for LGB 2-Axle cars

Positive centering action of the trucks on these cars does not always occur, but the simple installation of our centering springs and retainers will correct this problem. These parts are included with our No. 833 coupler packet or are available as this accessory packet.

Check packet; it should contain:
4 ea. truck spring retainers and
4 ea. truck springs.

over

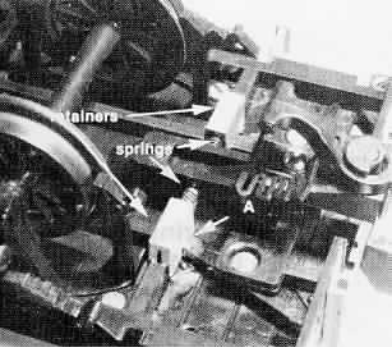

To install: Place retainers over crossmember as shown in photo, making sure they seat correctly. Remove retainers, apply glue and install, being sure to push back slightly so that point A serves as a locating stop and will absorb any stress placed on the retainer by spring. After glue is completely dry, install springs as shown in photo, using tweezers or small screwdriver. Test centering action of truck. Springs are made of stainless steel so they will not be affected by outdoor use.