

STEWART HOBBIES INC.

No.5® COUPLER CONVERSION

1. Remove the screw, existing coupler, Stewart Coupler pocket and lid. Save screw.
2. Assemble the No.5® Coupler with Centering Spring on top. Place Lid on Draft Gear Box. Align and secure to car coupler mounting platform with Stewart screw. You may wish to glue the No.5® box and lid together. Use a plastic compatible cement applied sparingly along seams only.
3. Check for correct coupler height, function, and clearance and make any adjustments necessary.

ALL ROLLING STOCK

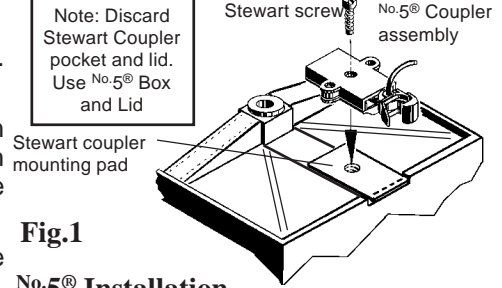


Fig.1

No.5® Installation